



DM503

Programming B

Peter Schneider-Kamp

petersk@imada.sdu.dk

<http://imada.sdu.dk/~petersk/DM503/>

ADVANCED OBJECT-ORIENTATION

Object-Oriented Design

- classes often do not exist in isolation from each other
- a vehicle database might have classes for cars and trucks
- in such situation, having a common superclass useful
- Example:

```
public class Vehicle {  
    public String model;  
    public int year;  
    public Vehicle(String model, int year) {  
        this.model = model; this.year = year;  
    }  
    public String toString() {return this.model+" from "+this.year;}  
}
```


Extending Classes

- `Car` and `Truck` then *extend* the `Vehicle` class
- Example:

```
public class Car extends Vehicle {  
    public String colour;  
    public Car(string model, int year, String colour) {  
        this.colour = colour;    // this makes NO SENSE  
    }  
    public String toString() { return this.colour; }  
}  
  
public class Truck extends Vehicle {  
    public double maxLoad;  
    ... }  
}
```

Class Hierarchy

- class hierarchies are parts of class diagrams
- for our example we have:

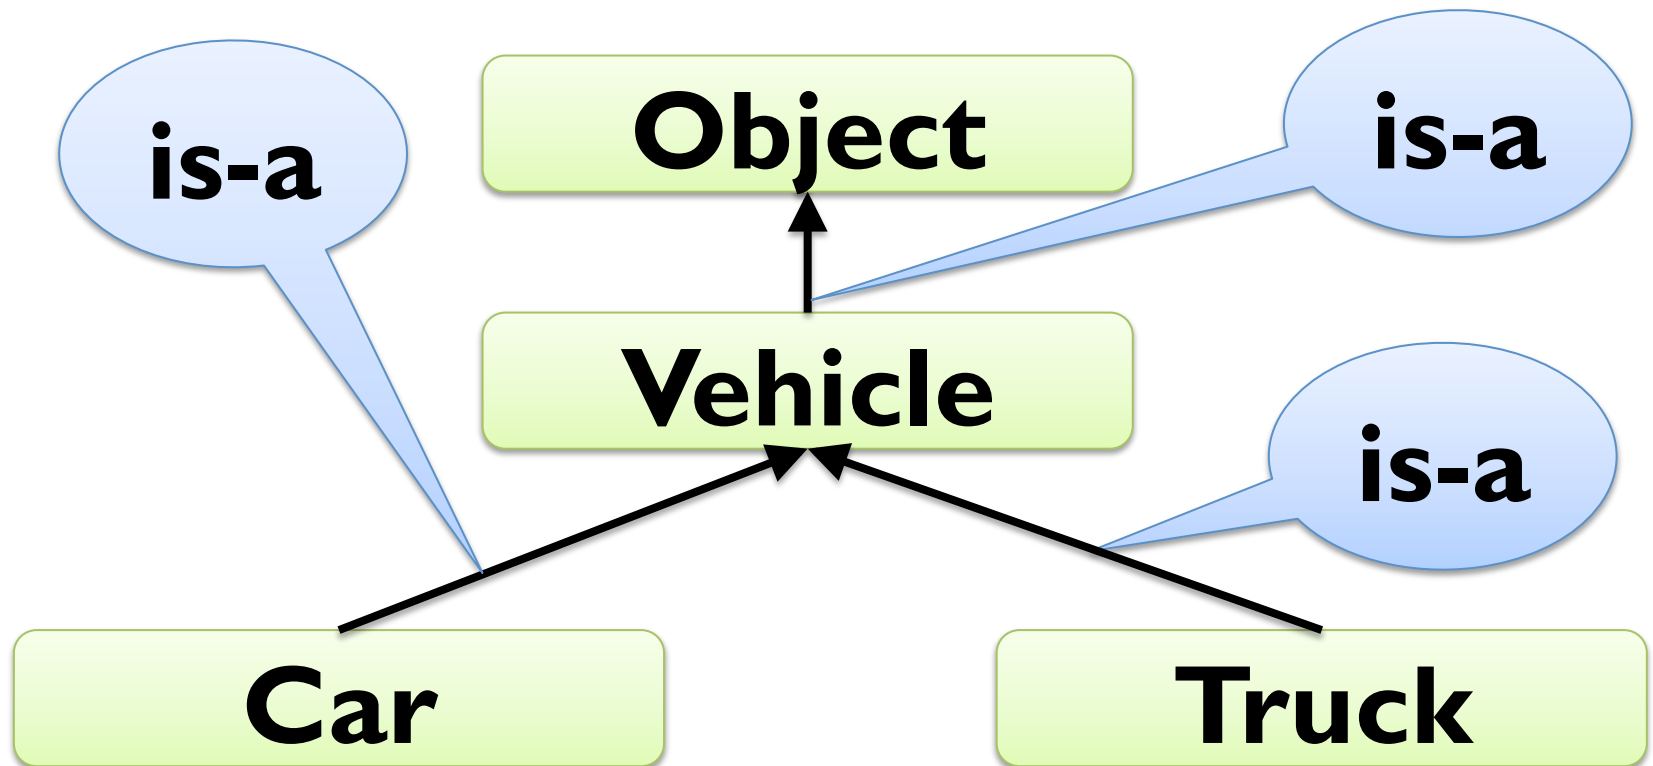

Abstract Classes

- often, superclasses should not have instances
- in our example, we want no objects of class `Vehicle`
- can be achieved by declaring the class to be *abstract*
- Example:

```
public abstract class Vehicle {  
    public String model;  
    public int year;  
    public Vehicle(string model, int year) {  
        this.model = model; this.year = year;  
    }  
    public String toString() {return this.model+" from "+this.year;}  
}
```

Accessing Attributes

- attributes of superclasses can be accessed using “this”
- Example:

```
public class Car extends Vehicle {  
    public String colour;  
    public Car(string model, int year, String colour) {  
        this.model = model; this.year = year; this.colour = colour;  
    }  
    public String toString() {  
        return this.colour+" "+this.model+" from "+this.year;  
    }  
}
```

Accessing Superclass

- methods of superclasses can be accessed using “super”
- Example:

```
public class Car extends Vehicle {  
    public String colour;  
    public Car(string model, int year, String colour) {  
        this.model = model; this.year = year; this.colour = colour;  
    }  
    public String toString() {  
        return this.colour+" "+super.toString();  
    }  
}
```


Superclass Constructors

- constructors of superclasses can be accessed using “super”
- Example:

```
public class Car extends Vehicle {  
    public String colour;  
    public Car(string model, int year, String colour) {  
        super(model, year);  
        this.colour = colour;  
    }  
    public String toString() {  
        return this.colour+" "+super.toString();  
    }  
}
```

Abstract Methods

- abstract method = method declared but not implemented
- useful in abstract classes (and later interfaces)
- Example:

```
public abstract class Vehicle {  
    public String model;  
    public int year;  
    public Vehicle(string model, int year) {  
        this.model = model; this.year = year;  
    }  
    public String toString() {return this.model+" from "+this.year;}  
    public abstract computeResaleValue();  
}
```

Interfaces

- different superclasses could have different implementations
- to avoid conflicts, classes can only extend one (abstract) class
- interfaces = abstract classes without implementation
- only contain **public abstract** methods (abstract left out)
- no conflict possible with different interfaces
- Example:

```
public interface HasValueAddedTax {  
    public double getValueAddedTax(double percentage);  
}
```

```
public class Car implements HasValueAddedTax {  
    public double getValueAddedTax(double p) { return 42000; }  
    ... }  
}
```


Interfaces

- Example:

```
public interface HasValueAddedTax {  
    public double getValueAddedTax(double percentage);  
}  
  
public interface Destructible {  
    public void destroy();  
}  
  
public class Car implements HasValueAddedTax, Destructible {  
    public double getValueAddedTax(double p) { return 42000; }  
    public void destroy() { this.model = "BROKEN"; }  
    ...  
}
```

Interface and Class Hierarchy

- interfaces outside normal class hierarchy

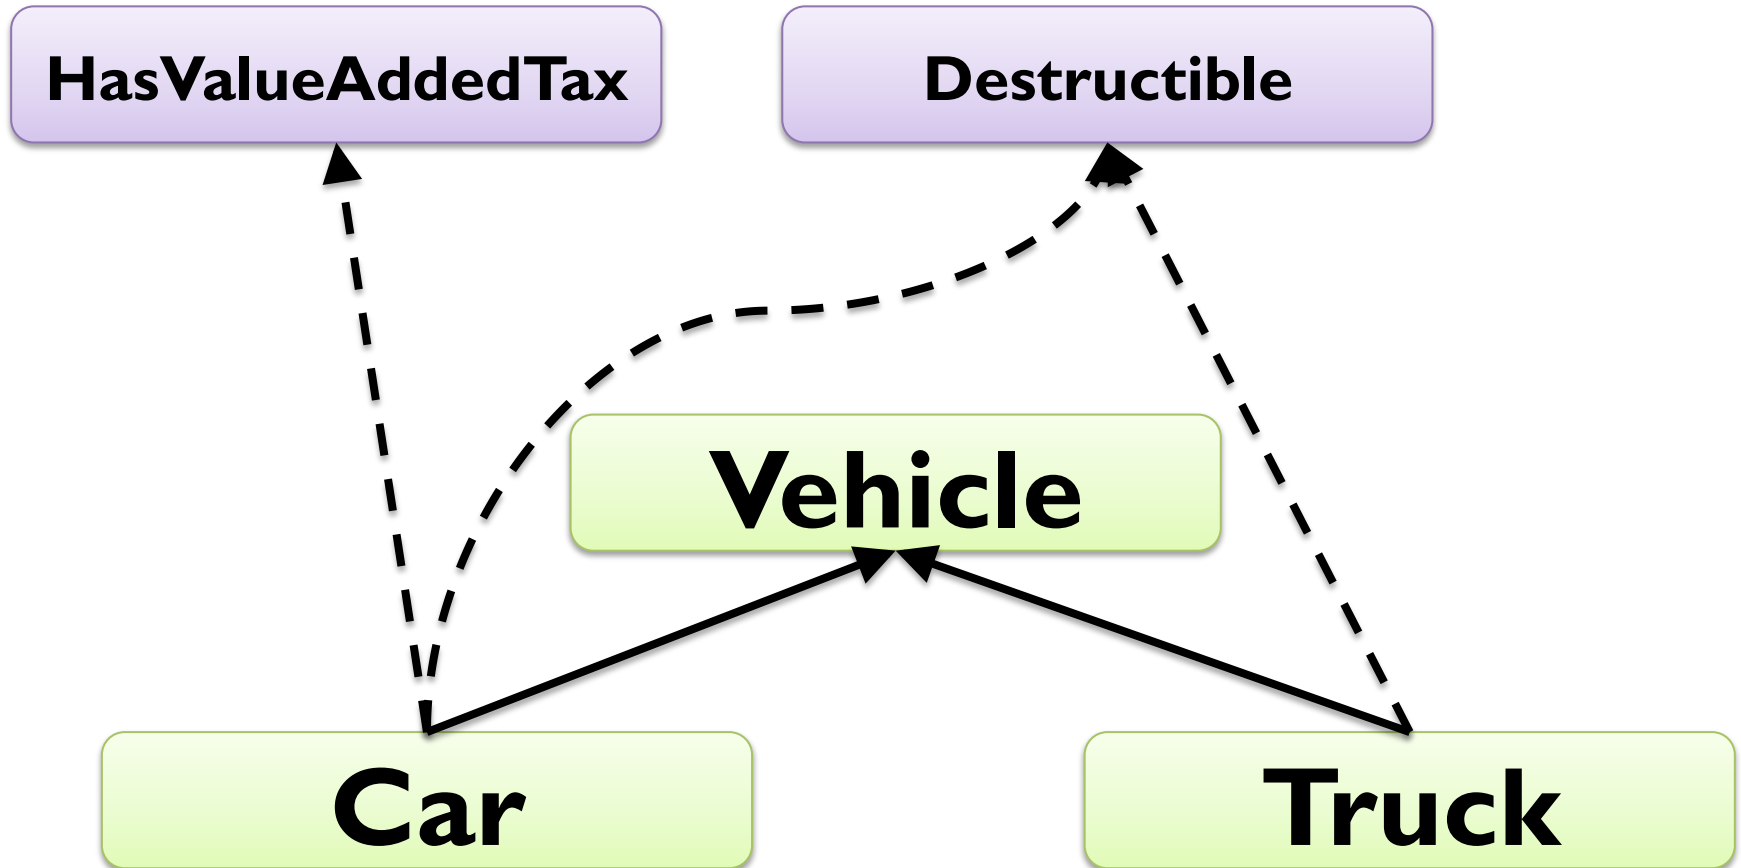

PROJECT PART I


Organizational Details

- exam project consisting of 2 parts
- both parts have to be passed to pass the course
- projects must be done individually, so no co-operation
- you may talk about the problem and ideas how to solve them
- deliverables:
 - written 4 page report as specified in project description
 - handed in BOTH electronically and as paper
 - deadline: Monday, December 12, 12:00
- ENOUGH - now for the FUN part ...

Board Games: Tic Tac Toe & Co

- Tic Tac Toe: simple 2 player board game played on a 3 x 3 grid

- extended rules for n-way Tic Tac Toe:
 - n players
 - $(n+1) \times (n+1)$ grid
 - 3 marks in a row, column, diagonal

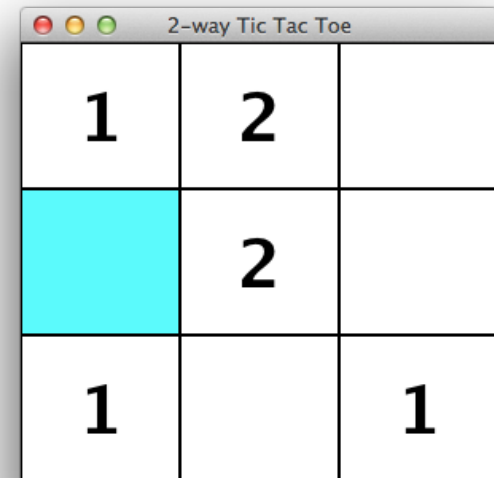

2-way Tic Tac Toe		
1	2	
	2	
1		1


- **Goal:** complete an implementation of n-way Tic Tac Toe
- **Challenges:** Interfaces, GUI, Array Programming

Board Games: Tic Tac Toe & Co

- Task 0: Preparation
 - download and understand existing framework
 - need to describe design in your report!
- Task 1: Bounding and Shifting Coordinates
 - implement check whether position on board or not
 - implement shift with given differential vector
- Task 2: Implementing the Board
 - get mark for a position or check if it is free
 - record the move of a player
 - check whether there are any moves left
 - check the winning condition

Board Games: Tic Tac Toe & Co

- Task 3: Testing the Game
 - test game play for standard 2 player 3 x 3 Tic Tac Toe
 - test game play for n-way Tic Tac Toe with $n > 2$
- Task 4 (optional): Connect Four
 - different simple board game
 - can be implemented similar to Tic Tac Toe
- Task 5 (optional): Go
 - rich board game in a league with chess
 - can be implemented like this, too
 - more challenging!

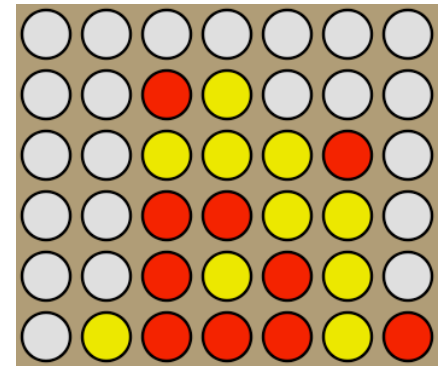

GRAPHICAL USER INTERFACES

HelloWorld Reloaded

- Java standard GUI package is Swing
- from popup message to professional user interface
- Example:

```
import javax.swing.*;  
public class HelloWorldSimple {  
    public static void main(String[] args) {  
        JOptionPane.showMessageDialog(null, "Hello World!");  
    }  
}
```

- more challenging to do anything more complicated
- multi-threaded event-driven model-based UI design :-o

Dialogs

- user dialogs are created using `JDialog` class
- basically like `JFrame` (next slide), but with a parent window
- often used via static `JOptionPane` methods
- Example:

```
Object[] options = {1, 2, 3, 4, 5, 10, 23, 42};
```

```
Object result = JOptionPane.showInputDialog(null,  
    "Select number", "Input",  
    JOptionPane.INFORMATION_MESSAGE, null,  
    options, options[0]);
```

```
int selectedInt = (Integer) result;
```

Creating a Window

- windows are represented by objects of class `JFrame`
- constructor gets title displayed at top of window
- Example:

```
JFrame window = new JFrame("My first window!");
```

```
window.setSize(400, 250); // set size of window to 700x400
```

```
window.setLocation(50, 50); // top-left corner at (50, 50)
```

```
// exit program when window is closed
```

```
window.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
```

```
window.setVisible(true); // show window on the screen
```

Creating Content

- content is placed in objects of class `JPanel`
- on these we can either
 - draw directly on it using the `paintComponent` method
 - add ready-made components using the `add` method
- every window has a `JPanel` as its main “content pane”
- Example 1 (draw directly):

```
public class MyPanel extends JPanel {  
    public void paintComponent(Graphics g) {  
        super.paintComponent(g);  
        g.drawString("My first panel!", 100, 100);  
    }  
}
```

Creating Content

- content is placed in objects of class JPanel
- on these we can either
 - draw directly on it using the `paintComponent` method
 - add ready-made components using the `add` method
- every window has a JPanel as its main “content pane”
- Example 2 (add a button):

```
 JButton button = new JButton("My first button!");  
 button.addActionListener(new ButtonHandler());  
 JPanel panel = new JPanel();  
 panel.add(button);  
 window.setContentPane(panel);  
 window.pack();
```


Listeners and Events

- events = changes in the user interface
- mouse movement, key pressed, button clicked, ...
- listeners = objects that respond to events
- Example ([ActionListener](#) for button from previous slide):

```
import java.awt.*;
import java.awt.event.*;
public class ButtonHandler implements ActionListener {
    public void actionPerformed(ActionEvent e) {
        System.exit(0);
    }
}
```

Mouse Events

- interface `MouseListener` for mouse events
- needs to be added using `addMouseListener` methods
- often component class implementing the interface itself
- Example (panel that changes color during click):

```
public class Clicky extends JPanel implements MouseListener {  
    public Clicky() { this.addMouseListener(this); }  
    public void mousePressed(MouseEvent event) {  
        this.setBackground(Color.RED);  
    }  
    public void mouseReleased(MouseEvent evt) {  
        this.setBackground(Color.GRAY);  
    } ... }  
}
```

Colors

- colors are represented by objects of class `Color`
- define by RGB values or use pre-defined constants
- Example:

```
import java.awt.*;
```

```
...
```

```
JPanel panel = new JPanel(new BorderLayout());
```

```
JPanel panelA = new JPanel();
```

```
panelA.setBackground(new Color(192, 64, 128)); // strange color
```

```
JPanel panelB = new JPanel();
```

```
panelB.setBackground(Color.RED);
```

```
panel.add(panelA, BorderLayout.NORTH);
```

```
panel.add(panelB, BorderLayout.SOUTH);
```

Labels

- simple component to display strings or images
- labels are objects of class `JLabel`
- text, colors, fonts etc. can be changed during runtime
- Example:

```
JLabel label = new JLabel("My first label!", JLabel.CENTER);
```

```
...
```

```
label.setText("something more interesting");
```

```
label.setForeground(Color.BLUE);
```

```
label.setBackground(Color.YELLOW);
```

```
label.setOpaque(true); // background filled
```

```
label.setFont(new Font("Serif", Font.ITALIC, 15));
```

Fonts

- fonts represented by objects of class `Font`
- constructor takes name, style, and point size
- see Java API documentation for more examples
- Example:

```
import java.awt.*;
```

```
...
```

```
Font font = new Font("Arial", Font.BOLD, 42);
```

```
JButton button = new JButton("Click me!");
```

```
button.setFont(font);
```

```
...
```

Borders

- borders are represented by objects of class **Border**
- borders can be added to any component
- typically created using static methods in **BorderFactory**
- Example:

```
JPanel panel = new JPanel(new GridLayout(3,3));  
for (int i = 0; i < 9; i++) {  
    JPanel subPanel = new JPanel();  
    subPanel.setBorder(BorderFactory.createLineBorder(  
        Color.BLACK));  
    panel.add(subPanel);  
}
```

Panel Layout

- layout = spatial organization of components
- components can be either
 - organized by absolute coordinates
 - organized by an object of class `LayoutManager`
- Example 1 (layout with `BorderLayout`):

```
JPanel panel = new JPanel(new BorderLayout());  
panel.add(new JButton("North"), BorderLayout.NORTH);  
panel.add(new JButton("Center"), BorderLayout.CENTER);  
panel.add(new JButton("West"), BorderLayout.WEST);  
panel.add(new JButton("South"), BorderLayout.SOUTH);  
panel.add(new JButton("East"), BorderLayout.EAST);
```

Panel Layout

- layout = spatial organization of components
- components can be either
 - organized by absolute coordinates
 - organized by an object of class `LayoutManager`
- Example 2 (layout with `GridLayout`):

```
JPanel panel = new JPanel(new GridLayout(2,3));  
panel.add(new JButton("North"));  
panel.add(new JButton("Center"));  
panel.add(new JButton("West"));  
panel.add(new JButton("South"));  
panel.add(new JButton("East"));
```